


JOEMARS BROKEN TAP REMOVER

QUICK SOLUTION TO BROKEN TAP,
NO MORE HEADACHES!



Feature:

- **Light, small, portable, compact design.**
- **High speed & high efficiency and low cost.**
- **Simple operation, easily remove broken tap.**
- **Full power source choices:**
100V/110V/120V/200V/220V/230V/240V, 1 PHASE, 50HZ/60HZ.
- **Dielectric:**
Using ordinary tap water as machining dielectric liquid.
- **Electrode:**
Using any brass bar as electrode.
- **Flexibility:**
Machining easily even on a large work piece.



- **No damage:**

Remove taps easily without damage the threads.


- **Complete functions:**

Auto feed, depth setting (stop at a specific depth), selectable arcing timer, auto retrace, work head swivel alarm message: depth arrival, arcing, over-temp.


- **More applications:**

Starting hole for Wire Cut EDM.


Cutting Tungsten Carbide or any harden steel.




MACHINING APPLICATIONS:

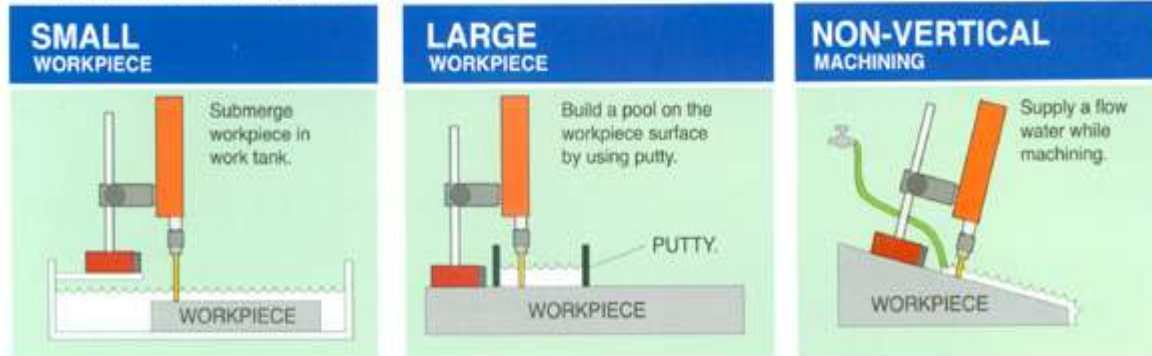

HOW TO REMOVE BROKEN TAP:

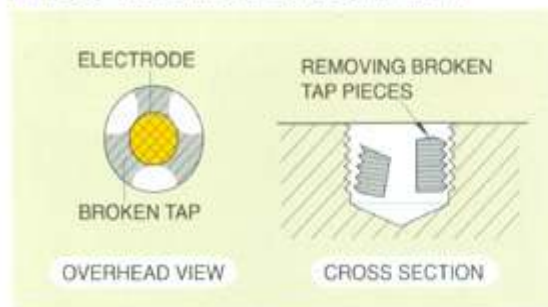

WORKHEAD SWIVEL:

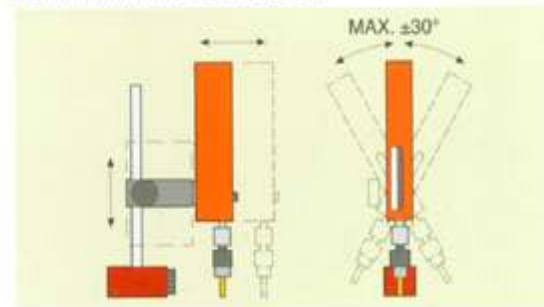

SPECIFICATIONS:

GENERATOR:

Weight: 17Kgs

Dimensions: 290X345X285 mm

MACHINE UNIT:


Weight: 6Kgs with magnetic stand


Dimensions: 53X70X375 mm

Electrode Holder : Max. $\varnothing 6.5$ mm

* All specifications & design are subject to change without notices.

DIMENSIONS:

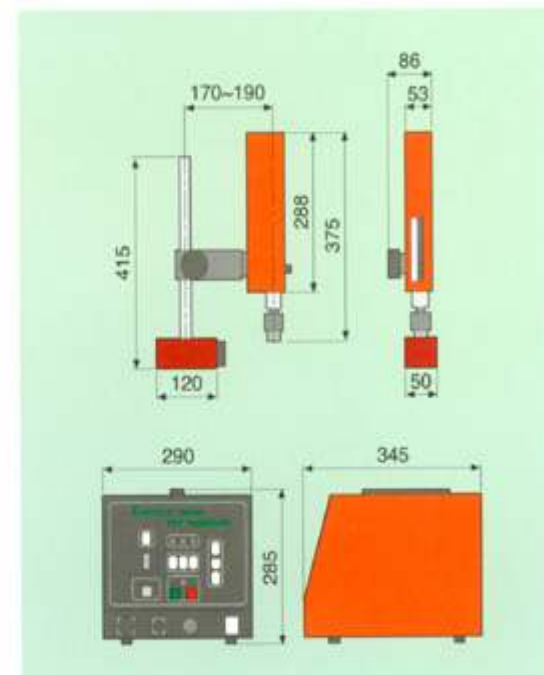



STANDARD ACCESSORIES:

- Generator
- Machine unit
- Chemical clay
- Chuck handle
- Brass electrode bar
 - φ1.5mm x 4PCS
 - φ2.0mm x 2PCS
 - φ2.5mm x 2PCS
 - φ3.0mm x 2PCS
 - φ4.0mm x 1PC
 - φ5.0mm x 1PC
 - φ6.0mm x 1PC